

DRIVE UNIT*

- Drive laterally, outlet left
- Belt Speed 4,6m/min
- Motor protection switch with ON/OFF switch
- Connection 3~ 400V/50Hz



BELT*

- PU-belt, teal, MTF-No. 14, FDA
- Temperature Resistance: -15°C to +90°C
- T-cleats, 30mm high, pitch 400mm

CARRIAGE*

- moveable

Ansicht: Z-Z

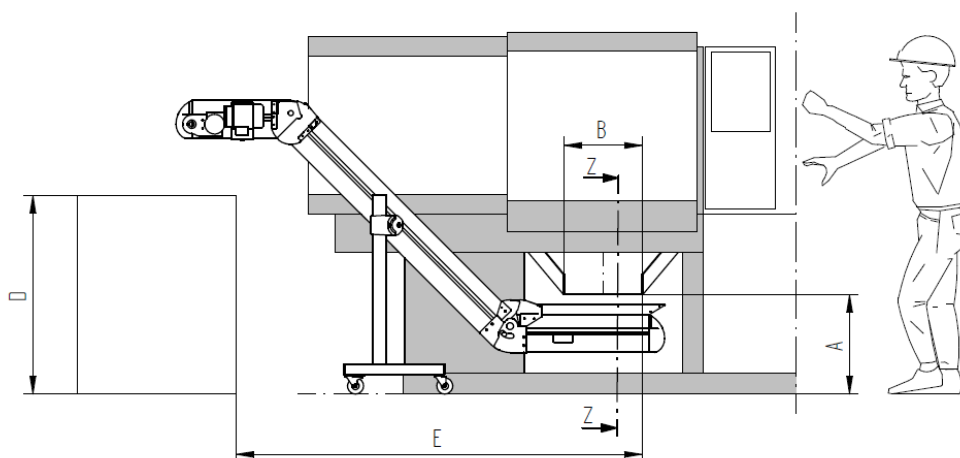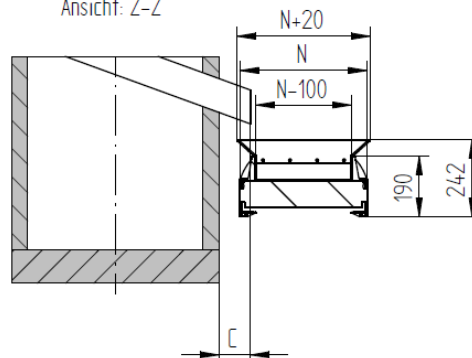

* Sample configuration – other configurations available on request

N (mm)	...please choose...
A (mm)	
B (mm)	
C (mm)	
D (mm)	
E (mm)	

Goods to be conveyed

Description			
Parts per time unit [pcs./min.]		Biggest part L x W x H [mm]	
Part temperature [°C]		Smallest part L x W x H [mm]	
Max. part weight [g]		Max. load on conveyor [kg]	

OPTIONS**

Frequency Inverter for continuously adjustable belt speed	☐
Clock Timer for Start-/Stop operation via potential free contact or adjustable run- and pause-time	☐
Carriage stationary	☐
Corrugated edges (for small, sharp parts)	☐
Conveyor covers	☐
Sleuable outlet chute	☐

Notes / Special requirements

** further options available on request