

DRIVE UNIT*



- Drive laterally, outlet left
- Belt Speed 4,6m/min
- Motor protection switch with ON/OFF switch
- Connection 3~ 400V/50Hz

BELT*

- PU-belt, teal, MTF-No. 14, FDA
- Temperature Resistance: -15°C to +90°C
- T-cleats, 30mm high, pitch 400mm

CARRIAGE*

- moveable

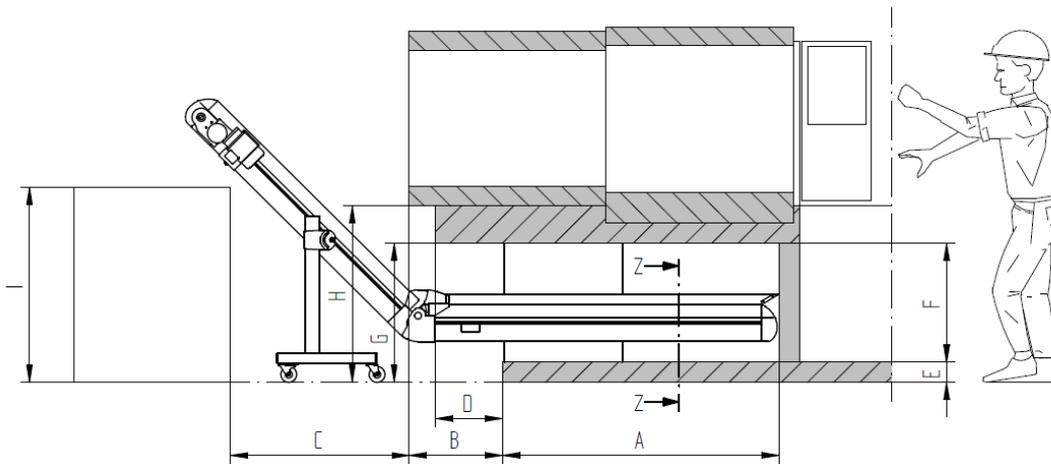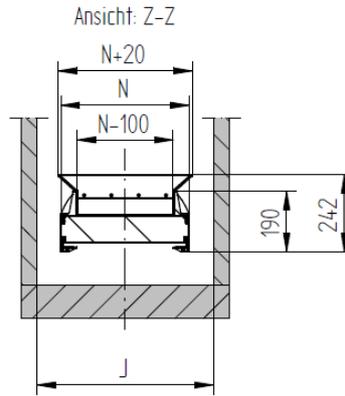

* Sample configuration – other configurations available on request

| | |
|--------|---------------------|
| N (mm) | ...please choose... |
| A (mm) | |
| B (mm) | |
| C (mm) | |
| D (mm) | |
| E (mm) | |
| F (mm) | |
| G (mm) | |
| H (mm) | |
| I (mm) | |
| J (mm) | |

Goods to be conveyed

| | | | |
|---------------------------------|--|------------------------------|--|
| Description | | | |
| Parts per time unit [pcs./min.] | | Biggest part L x W x H [mm] | |
| Part temperature [°C] | | Smallest part L x W x H [mm] | |
| Max. part weight [g] | | Max. load on conveyor [kg] | |

OPTIONS**

| | |
|--|--------------------------|
| Frequency Inverter for continuously adjustable belt speed | <input type="checkbox"/> |
| Clock Timer for Start-/Stop operation via potential free contact or adjustable run- and pause-time | <input type="checkbox"/> |
| Carriage stationary | <input type="checkbox"/> |
| Corrugated edges (for small, sharp parts) | <input type="checkbox"/> |
| Conveyor covers | <input type="checkbox"/> |
| Sleivable outlet chute | <input type="checkbox"/> |

| |
|------------------------------|
| Notes / Special requirements |
| |

** further options available on request