

DRIVE UNIT*


- Drive laterally, outlet left
- Belt Speed 4,6m/min
- Motor protection switch with ON/OFF switch
- Connection 3~ 400V/50Hz

BELT*

- PU-belt, teal, MTF-No. 14, FDA
- Temperature Resistance: -15°C to +90°C
- T-cleats, 30mm high, pitch 400mm

CARRIAGE*

- moveable

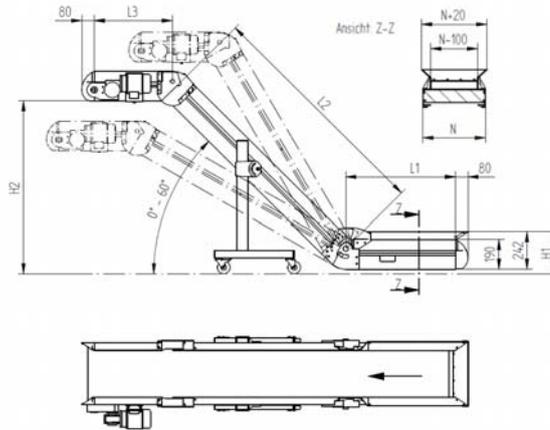

N (mm)	...please choose...
L1 (mm)	
L2 (mm)	
L3 (mm)	
H1 (mm)	
H2 (mm)	

* Sample configuration – other configurations available on request

Goods to be conveyed

Description			
Parts per time unit [pcs./min.]		Biggest part L x W x H [mm]	
Part temperature [°C]		Smallest part L x W x H [mm]	
Max. part weight [g]		Max. load on conveyor [kg]	

OPTIONS**

Frequency Inverter <small>for continuously adjustable belt speed</small>	<input type="checkbox"/>
Clock Timer <small>for Start-/Stop operation via potential free contact or adjustable run- and pause-time</small>	<input type="checkbox"/>
Carriage stationary	<input type="checkbox"/>
Corrugated edges <small>(for small, sharp parts)</small>	<input type="checkbox"/>
Conveyor covers	<input type="checkbox"/>
Sleuable outlet chute	<input type="checkbox"/>

Notes / Special requirements

** further options available on request