


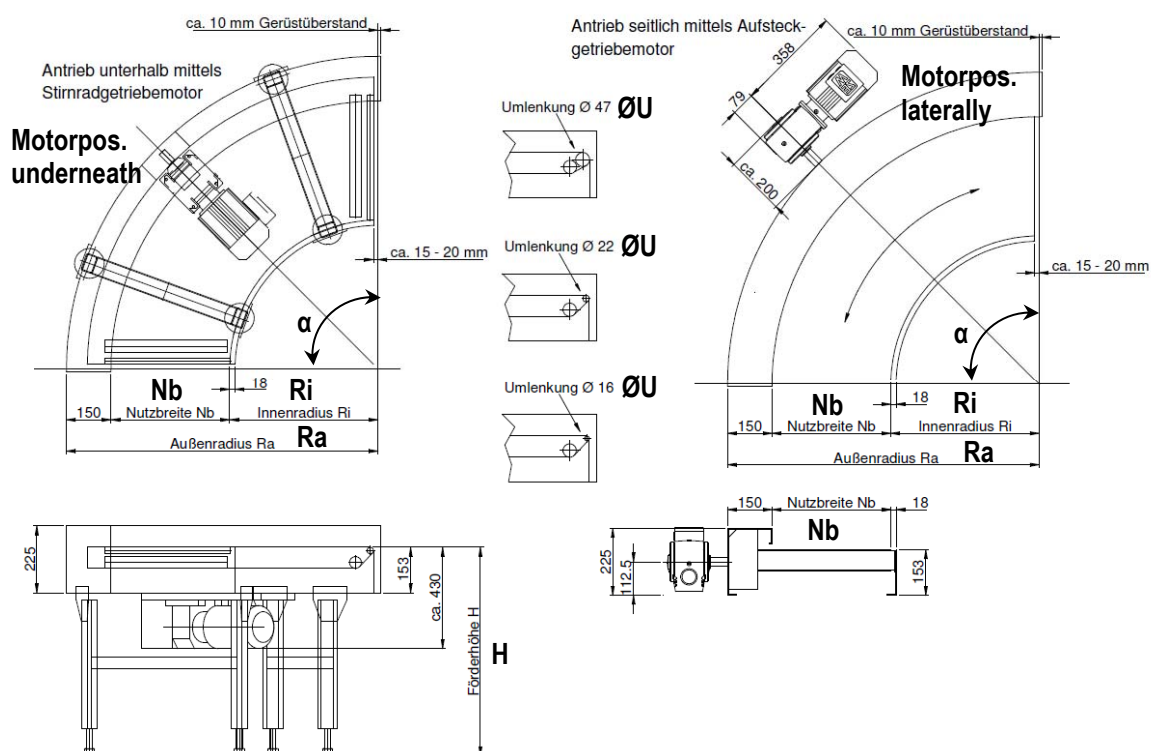

Nb (mm)	...bitte wählen...
Ri (mm)	
H (mm)	
ØU (mm)	
Motorpos.	
α (°)	
V (m/min) min. 3 m/min max. 35 m/min	

* Sample configuration – other configurations available on request

Goods to be conveyed

Description	
Parts per time unit [pcs./min.]	
Part temperature [°C]	
Max. part weight [g]	
Biggest part L x W x H [mm]	
Smallest part L x W x H [mm]	
Max. load on conveyor [kg]	

OPTIONS / Specification**

Frequency Inverter for continuously adjustable belt speed	☐
Clock Timer for Start-/Stop operation via potential free contact or adjustable run- and pause-time	☐
Carriage moveable	☐
Conveying direction	

Notes / Special requirements

** further options available on request