


- 3-phase planetary gear motor with brake
- Control unit mounted to carriage
- Electrical connection 3~ 400V/50Hz
- Easy operation of control unit
- Easy adjustment of stop positions

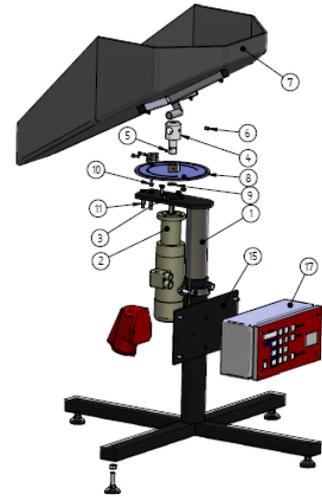

### SPECIFICATION\*

Design	
Pivoting range	
Chute material	
No. of desired stop positions (default setting, max. 15)	

Socket for feeding conveyer	
Control unit	
3-color light beacon	<input type="checkbox"/>
Wheel stand	<input type="checkbox"/>

Notes / Special requirements

\* further options available on request