
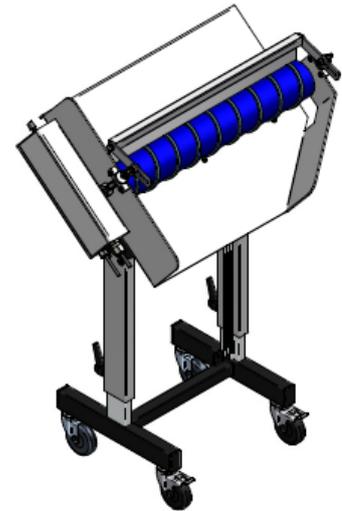


- Drum motor with torque monitor
- 15 speed levels between 8 and 140 rpm
- Control unit mounted on discharge sheet
- Electrical connection 230V/50Hz
- Easiest operation
- Wiper above the screw
- Moveable carriage, adjustable in height and inclination

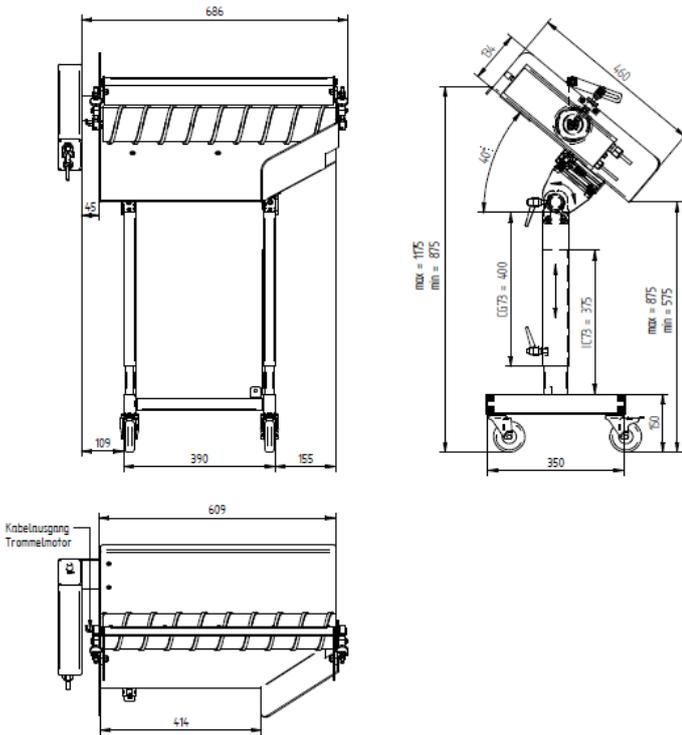

SPEZIFIKATION*

Samples available	
Cycle Time (s)	
No. of parts per shot (pcs.)	
No. of runners per shot (pcs.)	

Type (Discharge in conveying direction MSL: left / MSR: right)	
Separation length	<input type="checkbox"/>
Screw Material (Standard: PVC, other materials available at extra charge)	
Discharge sheet material (Standard: Aluminium, other materials available at extra charge)	
Screw height	

Notes / Special requirements

* further options available on request