
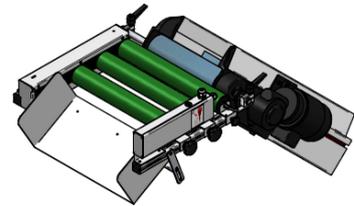


| Typ    | Rollerlänge RL<br>mm | Nennbreite NB<br>mm |
|--------|----------------------|---------------------|
| TA 400 | 400                  | 200 - 350           |
| TA 600 | 600                  | 400 - 500           |

- Drum motor with torque monitor
- 15 speed levels between 8 and 140 rpm
- Control unit mounted on discharge sheet
- Electrical connection 230V/50Hz
- Easiest operation
- Brackets to attach to conveyor

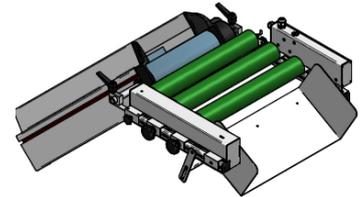

## SPECIFICATION\*

|                                |  |
|--------------------------------|--|
| Samples available              |  |
| Cycle Time (s)                 |  |
| No. of parts per shot (pcs.)   |  |
| No. of runners per shot (pcs.) |  |

|   |  |
|---|--|
| Roller Length<br>400mm for Conveyor Width max. 350mm,<br>600mm for Conveyor Width max. 550mm    |  |
| No. of rollers  |  |
| Discharge sheet material<br>(Standard: Aluminium, other materials available at<br>extra charge) |  |
|   |  |

| Notes / Special requirements |
|------------------------------|
|                              |

\* further options available on request