



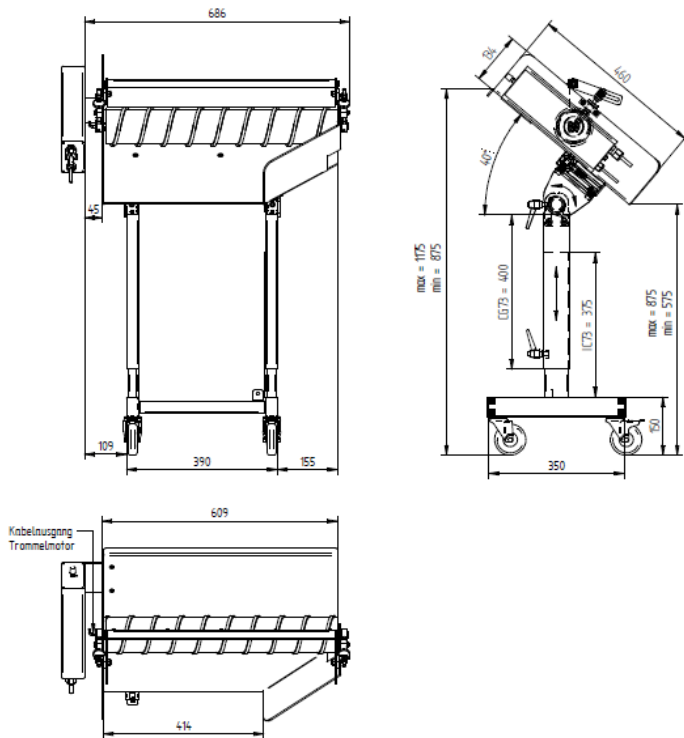

- Drum motor with torque monitor
- 7 speed levels between 15 and 92 rpm
- Control unit mounted on discharge sheet
- Electrical connection 230V/50Hz
- Easiest operation
- Wiper above the screw
- Moveable carriage, adjustable in height and inclination

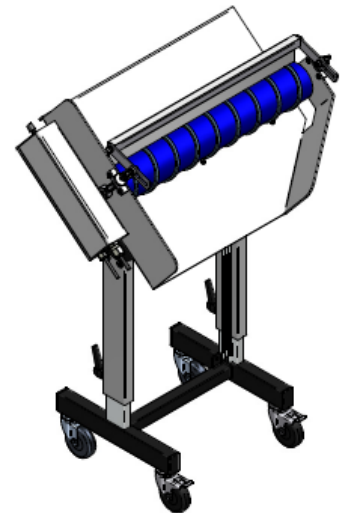

### SPEZIFICATION\*

|                                |  |
|--------------------------------|--|
| Samples available              |  |
| Cycle Time (s)                 |  |
| No. of parts per shot (pcs.)   |  |
| No. of runners per shot (pcs.) |  |
|                                |  |

|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Type<br>(Discharge in conveying direction MSL: left / MSR: right)                            |                          |
| Separation length                                                                            | <input type="checkbox"/> |
| Screw Material<br>(Standard: PVC, other materials available at extra charge)                 |                          |
| Discharge sheet material<br>(Standard: Aluminium, other materials available at extra charge) |                          |
| Screw height                                                                                 |                          |

| Notes / Special requirements |
|------------------------------|
|                              |

\* further options available on request