


35xx B

Separating Drum with Individual Adjustment

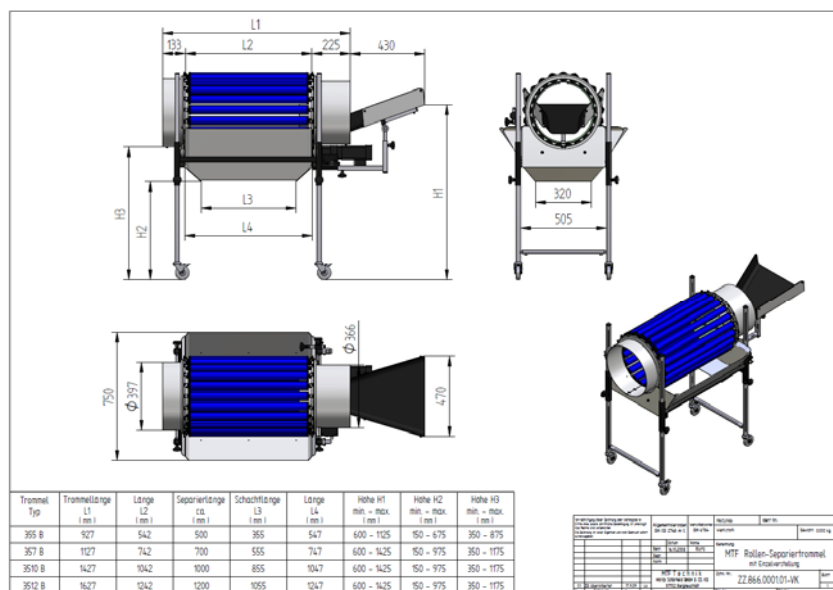

Samples available	
Cycle Time (s)	
No. of parts per shot (pcs.)	
No. of runners per shot (pcs.)	
Type of Separation	
Separating Length (mm)	
Separation Roller Material	
Material Supply (in flow direction)	

OPTIONS*

Frequency Inverter for continuously adjustable drum rotation (2 to 10 rpm)	☐
Reverse Control for continuously adjustable and reversible drum rotation	☐
Fortified Carriage	☐

Dust Cover, pluggable	☐
Acoustic Hood	☐
Executed as Sloughing Drum	☐

Notes / Special requirements

* further options available on request